



FLEX 450

Bimini Top assembly instructions



INTRODUCTION



Identifying the components of the fiberglass cover

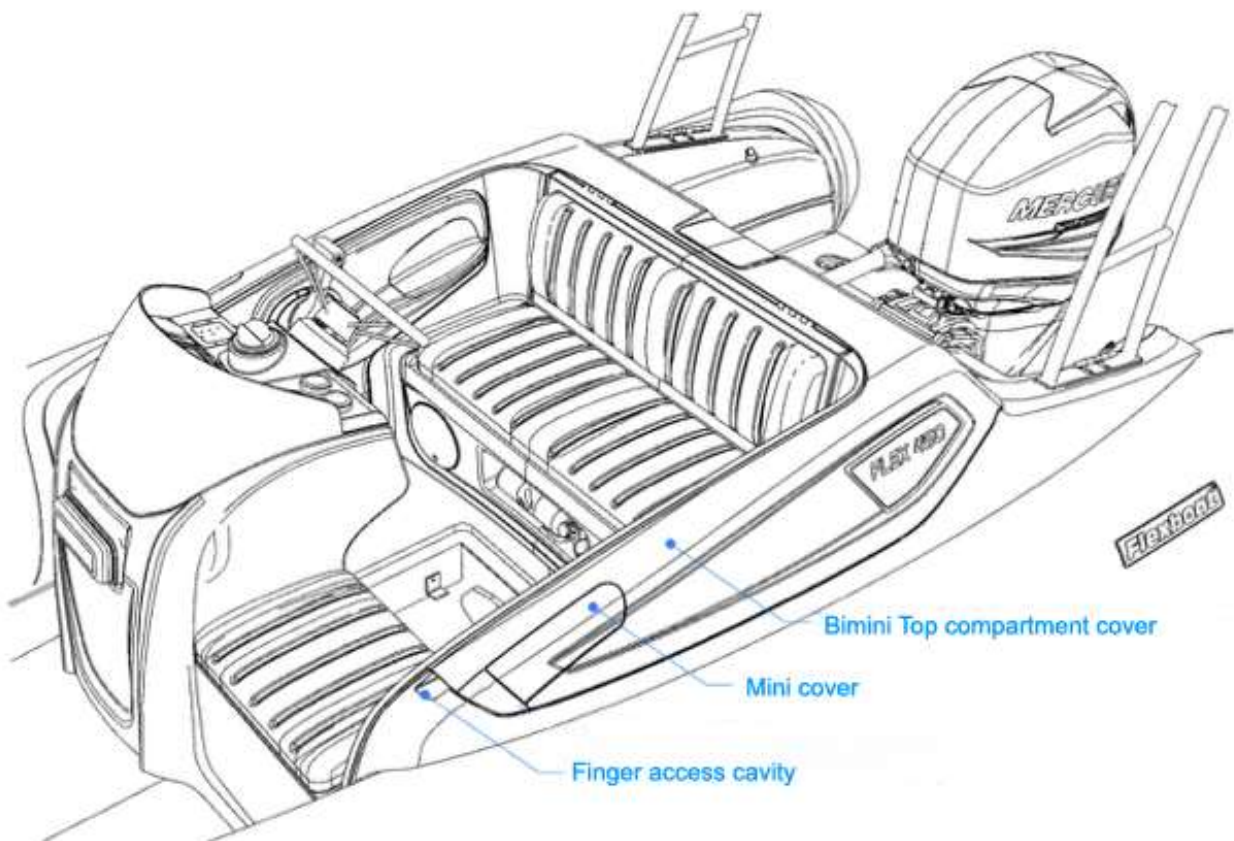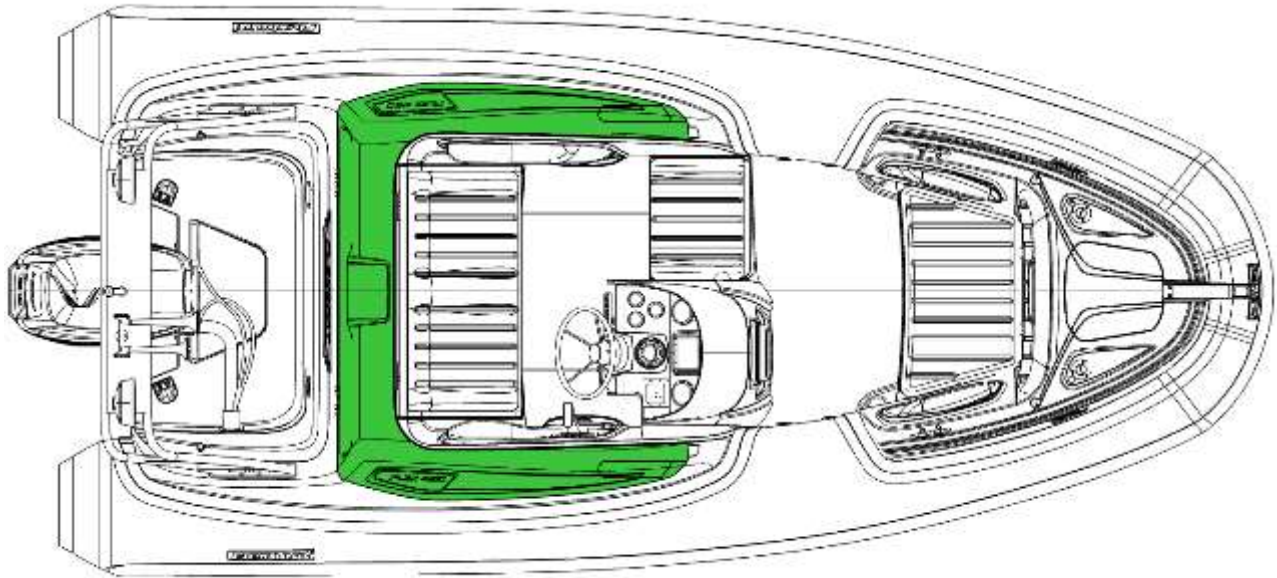

BIMINI TOP ASSEMBLY

STEP 1

Insert your finger in the access cavity and release the pressure latch by raising the end of the cover.

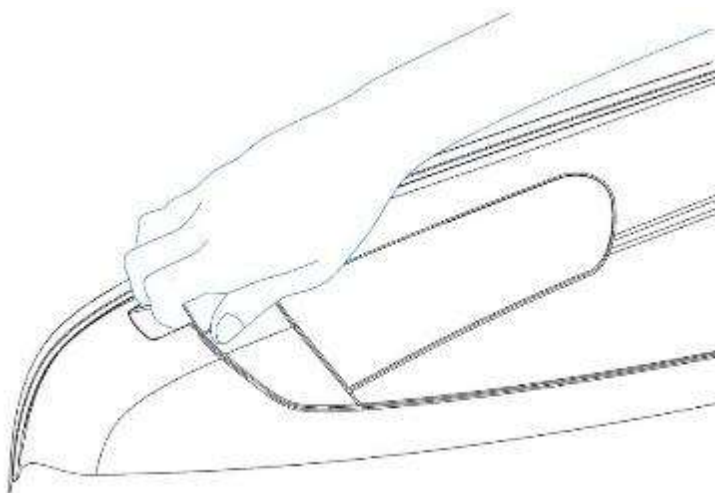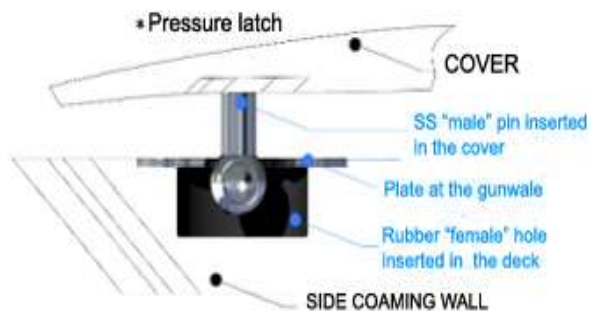

NOTE: The pressure latches are located in each side, in the front end of the Bimini Top cover, one to Port and the other to Starboard.



After releasing both pressure latches, completely raise the cover.



STEP2

With the cover fully raised, open both "Mini Covers" by releasing the Velcro straps.



STEP 3

Retrieve the Bimini Top from its receptacle, raise it and fully extend its telescopic legs. Then rest the Bimini Top on the bow of the boat.

1



2



3



4



5



STEP4

Close the compartment with both "Mini Covers" **open**.





***NOTE:**

Make sure that the "Mini Cover" stays behind the leg and inside the compartment.

STEP 5

Unroll the straps from the Bimini Top and attach the bow straps first, using the Bow Attachment Rings. Then attach the Stern straps, using the Stern Attachment Rings. The Bimini Top will be fully opened. Adjust if needed.

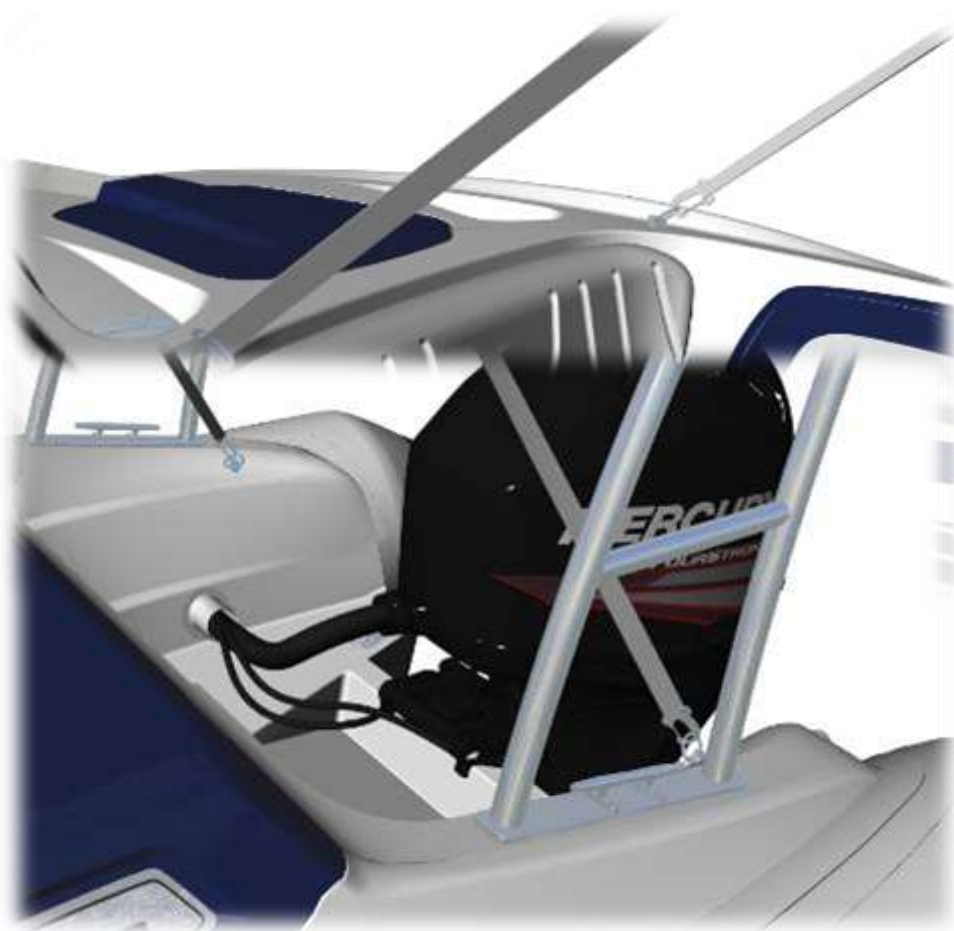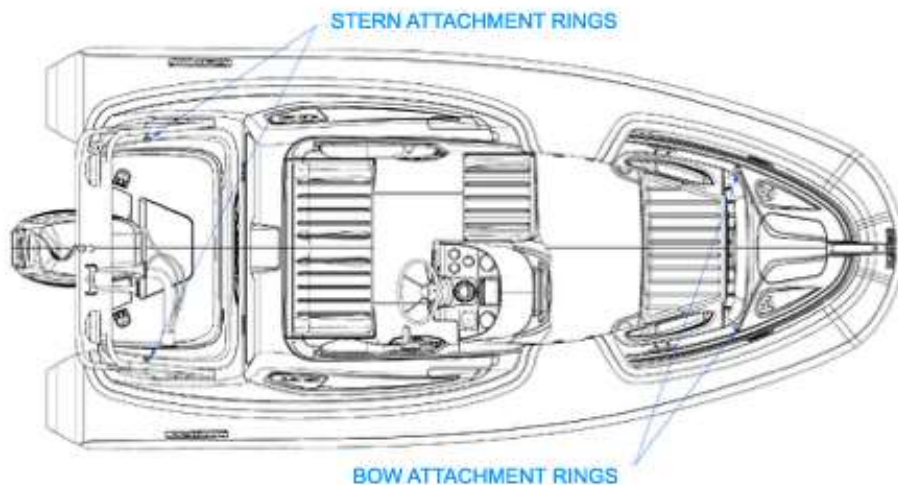

STORING THE BIMINI TOP

STEP 1

Release the stern straps, then release the bow straps.

STEP 2

Close the Bimini Top and roll the straps around it. Lean and rest the Bimini Top on the bow of the boat.

STEP 3

Release the pressure latches of the compartment cover and fully raise it.

STEP 4

Close the "Mini Covers" on both sides.

STEP 5

Raise the Bimini Top and lower its height by contracting its telescopic legs to their minimum length.

STEP 6

Lower the Bimini Top into its receptacle.

STEP 7

Close the Bimini Top compartment cover making sure the two pressure latches are fully locked.